

UNIVERSAL REPLACEMENT PROPELLERS



HEAVY DUTY CONDENSER TYPE 5-Blade Propellers, Continued

Part Number	Rot.	Dia. (")	Pitch	RPM	Static Pressure										Pack
					.0" WC		.1" WC		.2" WC		.3" WC		.4" WC		
					CFM	HP	CFM	HP	CFM	HP	CFM	HP	CFM	HP	
60-5613-01 60-5614-01	CW	22"	27°	825	3908	.180	3610	.196	3120	.214	2707	.212	2465	.258	2
				1075	5092	.398	4896	.415	4622	.439	4235	.467	3835	.748	
	CCW	22"	27°	1140	5400	.475	5230	.490	4960	.520	4650	.545	4240	.568	
60-5615-01 60-5616-01	CW	22"	33°	825	4704	.294	4281	.312	3608	.330	2934	.348	2505	.366	2
				1075	6129	.650	5831	.673	5449	.697	4934	.721	4349	.744	
	CCW	22"	33°	1140	6500	.775	6250	.800	5850	.825	5450	.850	4880	.875	
60-5617-01 60-5618-01	CW	24"	27°	825	5056	.284	4631	.314	4109	.337	2446	.354	1722	.401	2
				1075	6577	.627	6240	.664	5908	.702	5525	.737	4966	.760	
	CCW	24"	27°	1140	6942	.749	6626	.794	6332	.832	6015	.864	5624	.889	
60-5619-01 60-5620-01	CW	24"	33°	825	5791	.387	5409	.420	4789	.443	2875	.451	1919	.501	2
				1075	7555	.838	7258	.875	6922	.914	6509	.952	5892	.980	
	CCW	24"	33°	1140	7956	.984	7708	1.035	7418	1.084	7070	1.126	6604	1.157	
60-7613-01 60-7614-01	CW	26"	27°	825	6404	.457	5973	.484	5389	.520	4793	.540	3588	.584	1
				1075	8347	1.011	8011	1.049	7660	1.088	7278	1.126	6841	1.161	
	CCW	26"	27°	1140	8850	1.205	8540	1.240	8220	1.280	7875	1.328	7150	1.383	
60-7615-01 60-7616-01	CW	26"	33°	825	7471	.649	6887	.698	6215	.733	5370	.758	3528	.822	1
				1075	9741	1.436	9294	1.493	8840	1.547	8292	1.619	7743	1.644	
	CCW	26"	33°	1140	10330	1.712	9920	1.772	9470	1.832	9020	1.896	8175	2.050	

UNIVERSAL REPLACEMENT PROPELLERS




PROPELLER ACCESSORIES (Use on all 3-Blade, 4-Blade and 5-Blade Propellers)

Interchangeable Hubs

FEATURES

- All steel with extra metal in the two mounting surfaces (hex and round) for more secure fit in multiple applications.
- Hex on one side, round on the other (may use either side) – one inventory for all propellers.
- Zinc plated, coated with gold chromate for double protection.
- Setscrews are heat treated, black oxide.
- Mounting screws: zinc plated, heat treated, pan slotted – with locking serrations under the head – with nylock patch for added locking strength (double locking device designed to grip into the threads without backing out).
- 5/8" and 3/4" have keyway with extended body length for increased strength.
- Can be ordered in boxes of 12 or individually.

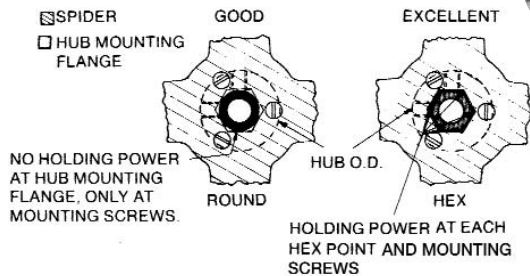

Allen Head Setscrews



Part Number	Description	Recommended Seating Torque	Pkg.
050550-01	1/4-28 x 1/2"	70 In-lbs.	12
050550-02	5/16-24 x 5/8"	130 In-lbs.	12

TECHNICAL TIP:

Lau HEX design takes the torque off the screws and puts it on the hub and spider ... where it belongs!

HEX/Round Hubs

(includes set and mounting screws)

Part Number	Bore	Setscrews
60-7658-01	1/4"	1
60-7658-02	5/16"	1
60-7658-03	3/8"	1
60-7658-04	1/2"	2
60-7658-05	5/8"*	2
60-7658-06	3/4"*	2

*with keyway

Specifications are subject to change without notice or obligation.